P31-300

Manufacturer:
PENDOCK, Halesfield 19, Telford, Shropshire, TF7 4QT.
T: 01952 580590 **E**: sales@pendock.co.uk **W**: www.pendock.co.uk

Product Range:
Pendock Ducting

PENDOCK DUCTING
SCREED DUCT & TRUNKING

Product Reference:
FDT 50x100

Product Description:
FDT floor ducting is designed for use when installing pipework within solid floors to provide a practical, effective and versatile solution that is also aesthetic and allows simple access for maintenance, inspection or pipework repairs.

Size:
50mm deep overall (inc a 12mm plywood cover) x 100mm wide (130mm wide overall inc shoulder flanges)

Length:
2500mm Duct - 2440mm Cover

Thickness: 22 gauge (0.76mm) hot dipped galvanised mild steel tray with 12mm plywood cover as standard

Internal Working Space (approx):
37mm x 90mm minimum

Finish / Colour:
hot dipped galvanised mild steel

Jointing:
Butt Joint (see accessories)

Accessories:
Corners (supplied in 1250mm lengths for site separation and installation)
Tees (supplied in 1250mm lengths for site separation and installation)
Stop Ends
Butt Joint Plates

British Standards:
Hot dipped galvanised mild steel duct tray to BS 2989: 1982 class Z2
12mm thick decorative plywood cover to BS 1203: 1979

Drawing References:
FDT-50x100

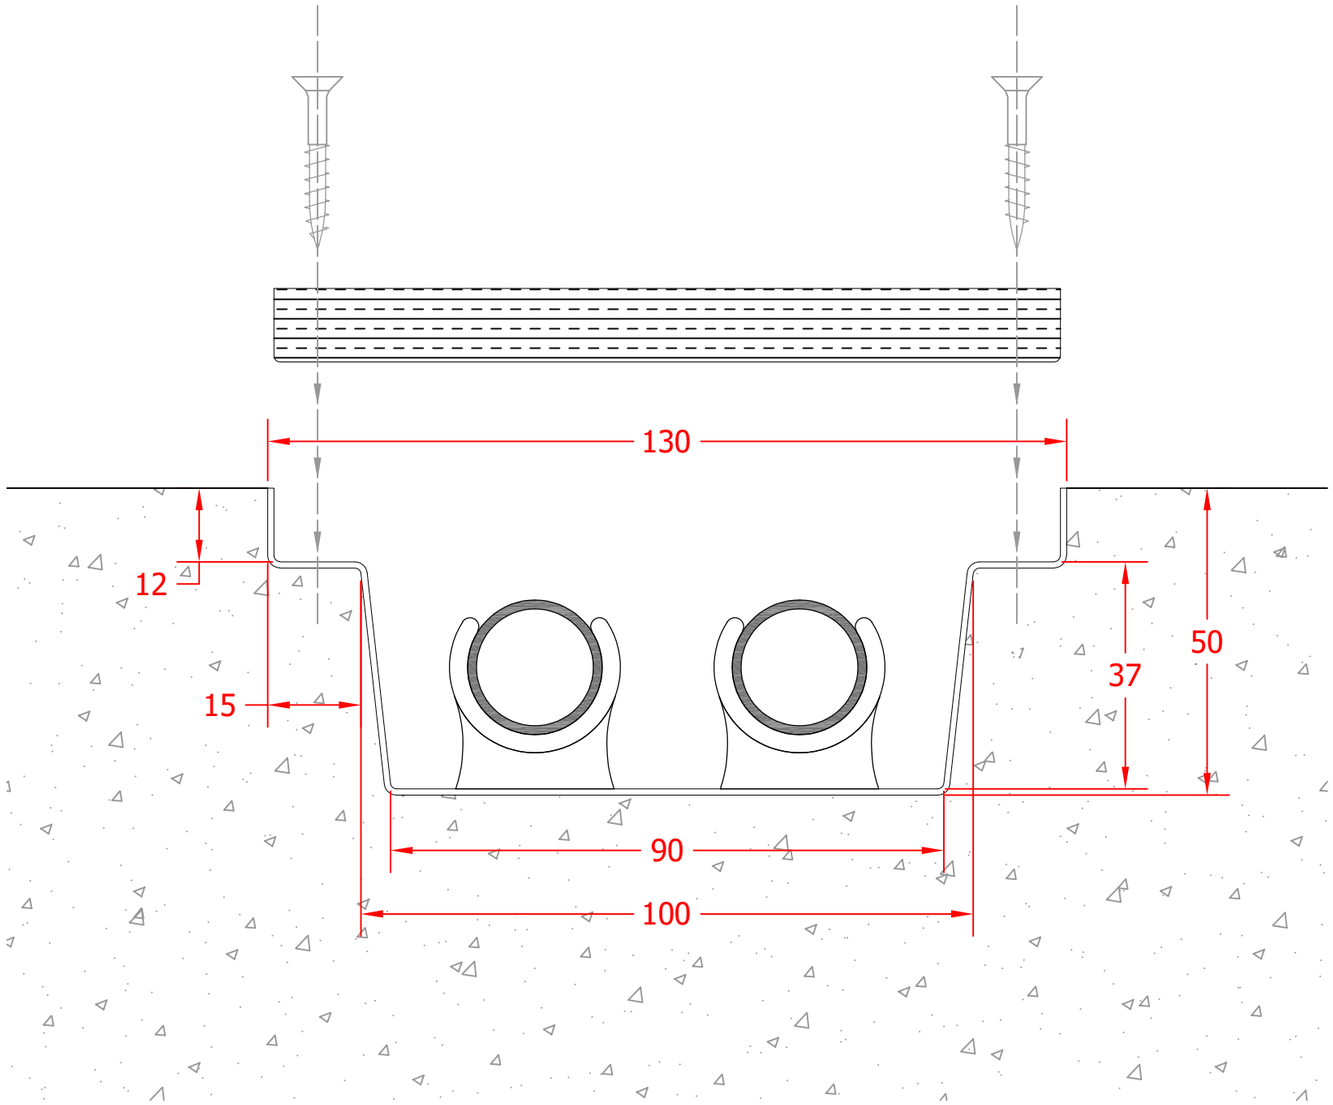

PRODUCT RANGE:	PENDOCK DUCTING		REV:	DATE:	REVISION:	INIT:	APPROVED BY:	
PRODUCT REF:	FDT-50x100						COMPANY:	
DRAWING No:	FDT-50x100							
REVISION:	-						PRINT NAME:	
CREATED:	1.1.20							
DRAWN BY:	TECHNICAL DEPARTMENT	PAPER SIZE					SIGNATURE:	
DWG SCALE(S):	NTS	-						
COLOUR / FINISH REF:	N/A	PROJECTION THIRD ANGLE	COPYRIGHT © 2020 ALL RIGHTS RESERVED - THIS DRAWING IS STRICTLY THE PROPERTY OF PENDOCK - (TP MANUFACTURING LTD)				DATE:	

PENDOCK
THE CASING & ENCLOSURE SPECIALIST
HALESFIELD 19
TELFORD
SHROPSHIRE TF7 4QT
(t) 01952 580590 (f) 01952 587805
sales@pendock.co.uk
www.pendock.co.uk