

**P20-170 - Pr\_35\_90\_43\_66**

**Manufacturer:**  
 PENDOCK, Halesfield 19, Telford, Shropshire, TF7 4QT.  
 T: 01952 580590 E: sales@pendock.co.uk W: www.pendock.co.uk

**Product Range:**  
 Pendock Safeheat



**Product Reference:**  
 Ultima

**Product Description:**  
 The Pendock Safeheat range, of low surface temperature (LST) radiator guards are designed and manufactured to protect residents, children and patients by reducing the risk of burn injury in a wide range of sectors including care-homes, sheltered housing, schools and hospitals, as well as other healthcare, education and residential applications.

**Size:**  
 All sizes are available to suit specific applications. Guards are manufactured project specifically to ensure suitability and maximise performance.

**Length:**  
 All sizes are available to suit specific applications. Guards are manufactured project specifically to ensure suitability and maximise performance. Long guards can be manufactured in sections and bolted together to form a one piece unit where required.

**Thickness:**  
 2mm Zintec as standard

**Profile Angle:**  
 90 degree unit with Bullnose edges

**Finish / Colour:**  
 Polyester Powder Coating (PPC) to RAL 9010 as standard. Other PPC colours and finishes are available

**Fixing method:**  
 External Lugs for mechanical fixing to substrates

**Accessories / Options:**  
 Antibacterial Coatings  
 Access Panels for valve access  
 Skirting Cut-Outs  
 Coved flooring cut-outs  
 Anti-ligature internal mesh protection  
 External Fixing Lugs

**Drawing References:**  
 ULTIMA

Batten (not supplied) to be fixed to wall underneath the top of the guard to provide stability and strength

Valve access cut-outs and cover plates - Positioned as required to suit Valve locations

Long guards can be manufactured in two pieces and bolted together to form one guard

Guard fixed to wall using suitable fixings (not supplied) through external lugs


Bullnose edges

Valve access cut-outs and cover plates - Positioned as required to suit Valve locations

Skirting & Pipework cut-outs where required (with tolerance)

Can be used in conjunction with Pendock Profiles pipe boxing

Apertures for airflow

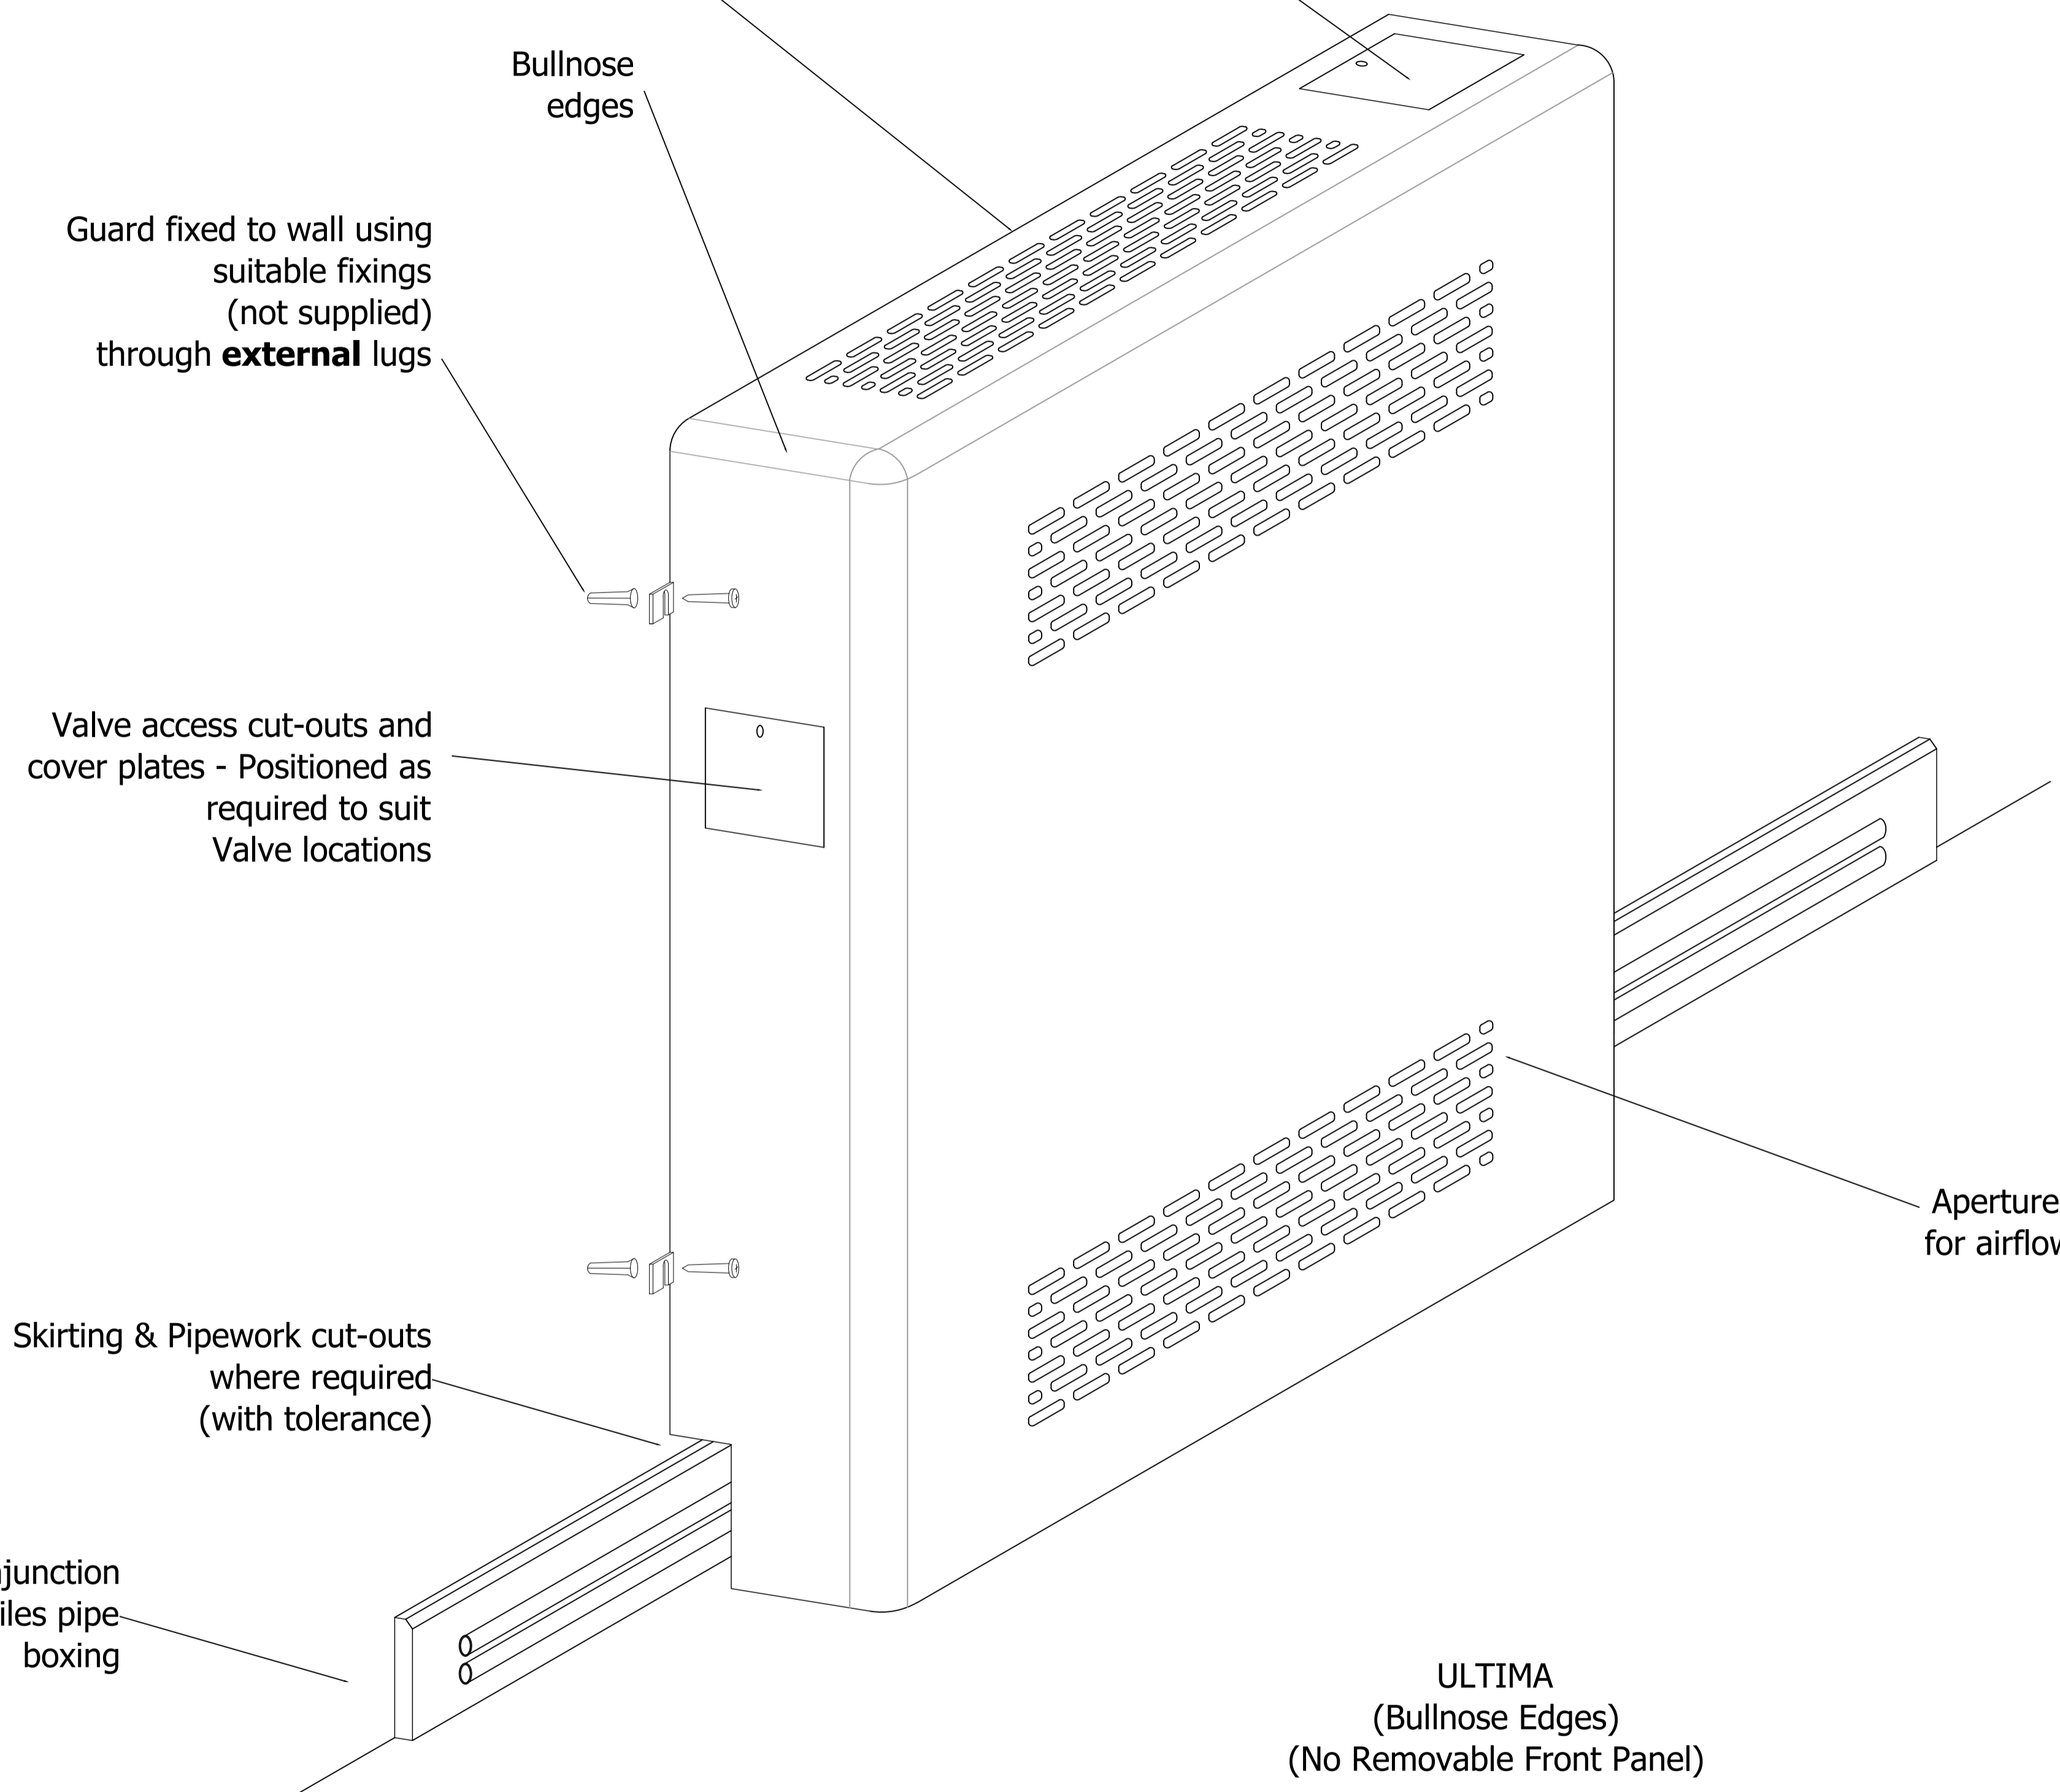

ULTIMA  
 (Bullnose Edges)  
 (No Removable Front Panel)

PRODUCT RANGE:	Pendock SafeHeat		REV:	DATE:	REVISION:	INIT:	APPROVED BY:		
PRODUCT REF:	Ultima						COMPANY:		
DRAWING No:	Ultima						PRINT NAME:		
REVISION:	-						SIGNATURE:		
CREATED:	10.02.23						DATE:		
DRAWN BY:	TECHNICAL DEPARTMENT	PAPER SIZE							
DWG SCALE(S):	NTS	-							
COLOUR / FINISH REF:	PPC TO 9010 AS STANDARD - ANY RAL COLOUR AVAILABLE UPON REQUEST	PROJECTION THIRD ANGLE	COPYRIGHT © 2020 ALL RIGHTS RESERVED - THIS DRAWING IS STRICTLY THE PROPERTY OF PENDOCK - (TP MANUFACTURING LTD)						



THE CASING & ENCLOSURE SPECIALIST

HALESFIELD 19  
 TELFORD  
 SHROPSHIRE TF7 4QT  
 (t) 01952 580590 (f) 01952 587805  
 sales@pendock.co.uk  
 www.pendock.co.uk